



LIGHTING CATALOGUE 2022

Less Power , More Light.



EG.Light
EL SEWEDY



01000393917



18 شارع الدكتور محمد على البقل مصر الجديدة



eglight-elsewedy.com



info@eglight-elsewedy.com



BACKLIGHT PANEL 60*60

48 W

Product Data

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100lm/w
CCT :	3000-4500-6500 k
BODY MATERIAL :	ALUMINUM,STEEL SHEET,POLYSTYRENE
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
Driver :	EL SEWEDY
Power :	48 w
IP :	54
LIGHT SOURCE :	SMD

LUMEN


48W (100 lm/W)	4800 LUMEN
----------------	------------


LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

48 W (White)	P48-6-S-44-223
--------------	----------------

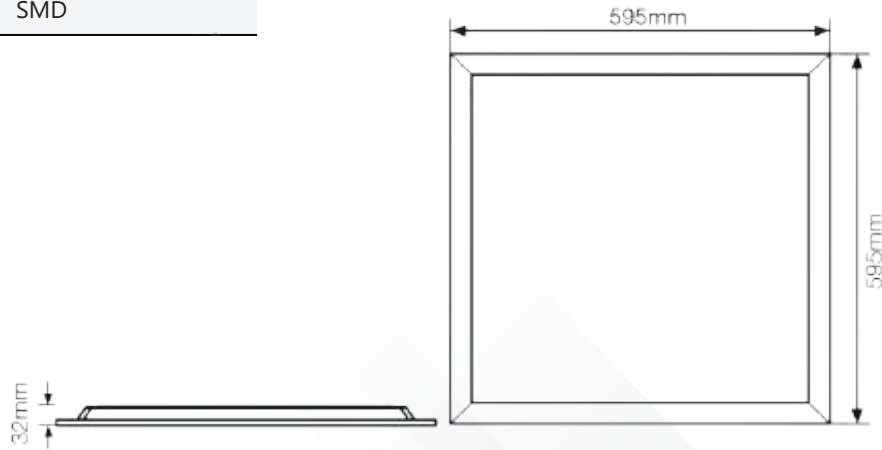

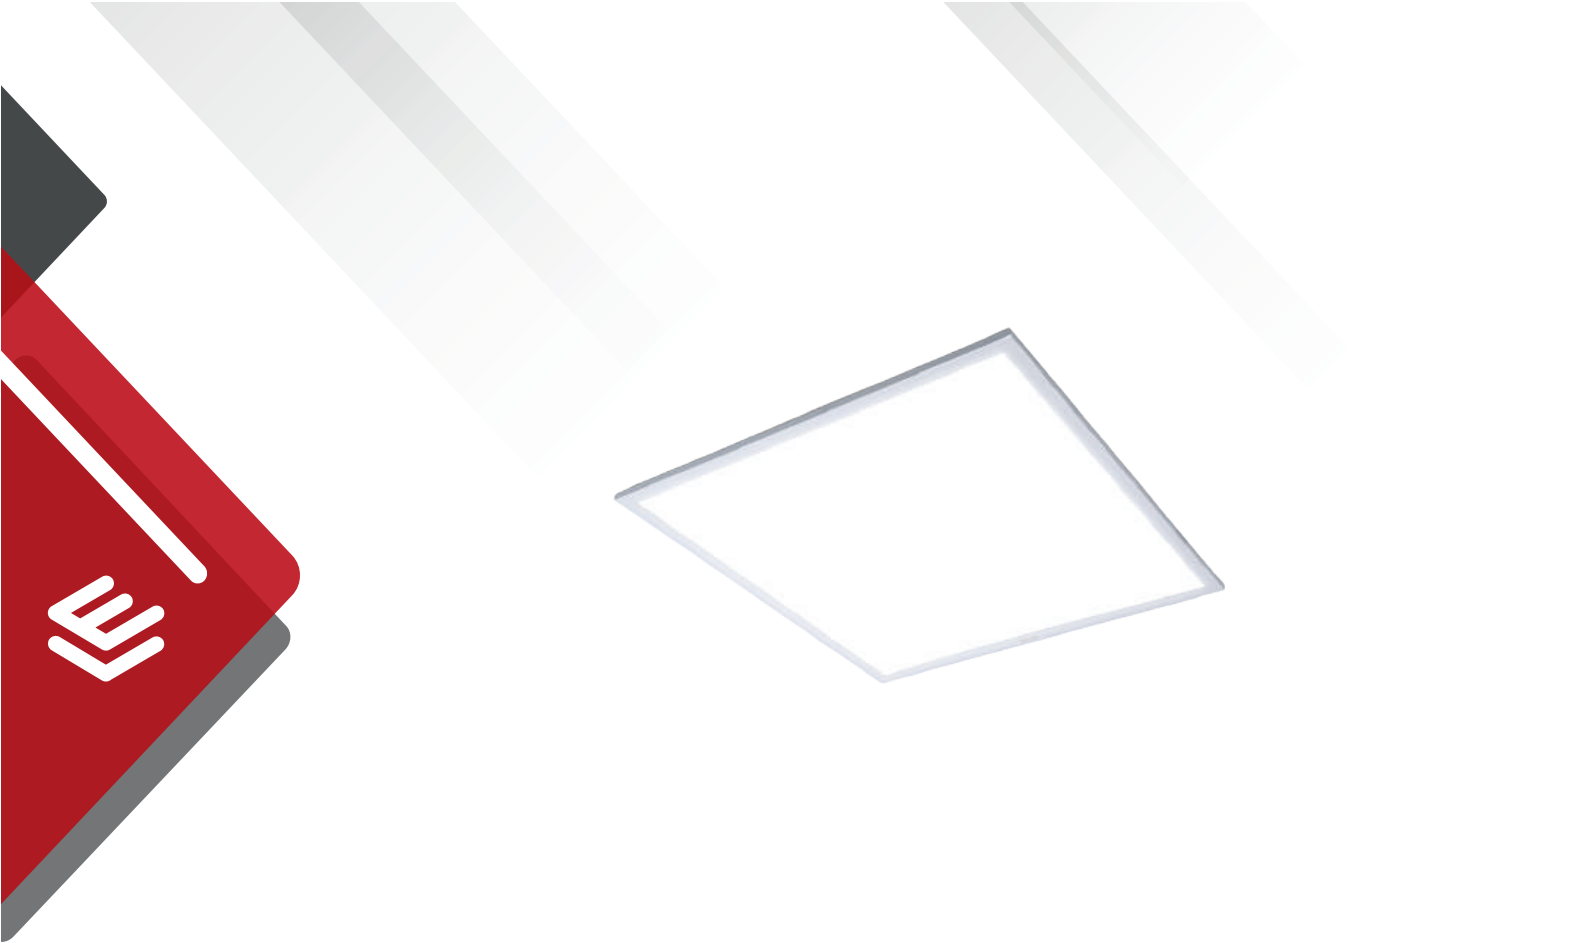

LED SLIM PANEL 60*60 48W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	60-50 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	48 W
IP :	54
LIGHT SOURCE :	SMD

LUMEN


48 W (100 Lm/W)	4800 Lm
-----------------	---------

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

48 W	SP48-6-R-44-122
------	-----------------

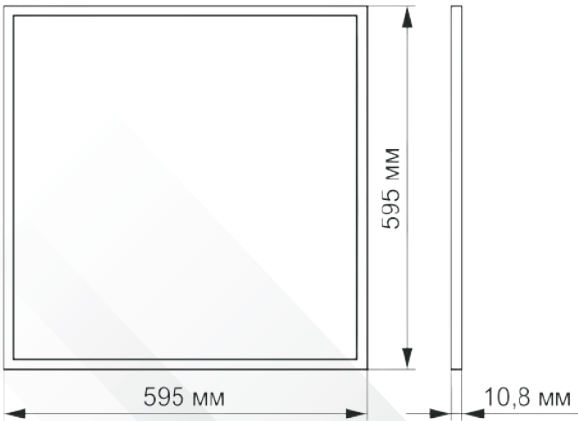



LED SLIM PANEL 120*30 48W

Product Data

ELECTRICAL FEATURES


INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	60-50 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	48 W
IP :	54
LIGHT SOURCE :	SMD

LUMEN

48 W (100 Lm/W)	4800 Lm
-----------------	---------

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

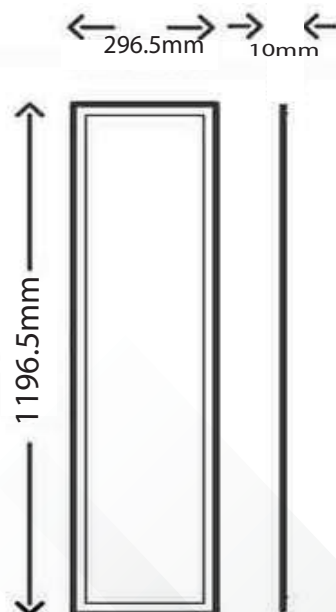



LED SLIM PANEL 120*60

90W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	60-50 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	90 W
IP :	54
LIGHT SOURCE :	SMD

LUMEN

90 W (100 Lm/W)	9000 Lm
-----------------	---------

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS





LED SILM PANEL (ROUND)

3,6,12,18,24W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.60
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	3,6,12,18,24 W
IP :	44
BEAM ANGLE :	120

LUMEN


3 W (100 Lm/W)	300 Lm
6 W (100 Lm/W)	600 Lm
12W (100 Lm/W)	1200 Lm
18 W (100 Lm/W)	1800 Lm
24 W (100 Lm/W)	2400 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

3 W (WHITE)	RP3-6-R-44-101
6 W (WHITE)	RP6-6-R-44-103
12 W (WHITE)	RP12-6-R-44-105
18 W (WHITE)	RP18-6-R-44-107
24 W (WHITE)	RP24-6-R-44-109

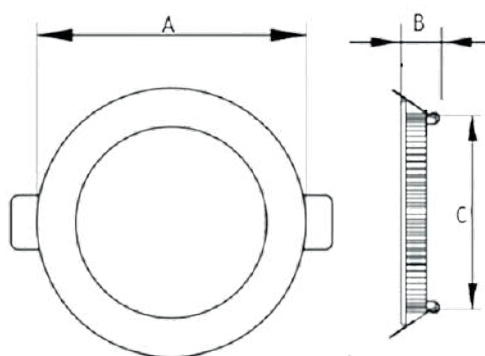

WATT	A	B	C
3W	85	22	70
6W	120	22	105
12W	170	22	155
18W	225	22	205
24W	300	22	285



LED SILM PANEL (SQAURE)

3,6,12,18,24W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.60
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	3,6,12,18,24 W
IP :	44
BEAM ANGLE :	120

LUMEN


3 W (100 Lm/W)	300 Lm
6 W (100 Lm/W)	600 Lm
12W (100 Lm/W)	1200 Lm
18 W (100 Lm/W)	1800 Lm
24 W (100 Lm/W)	2400 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

3 W (WHITE)	SP3-6-R-44-111
6 W (WHITE)	SP6-6-R-44-113
12 W (WHITE)	SP12-6-R-44-115
18 W (WHITE)	SP18-6-R-44-117
24 W (WHITE)	SP24-6-R-44-119

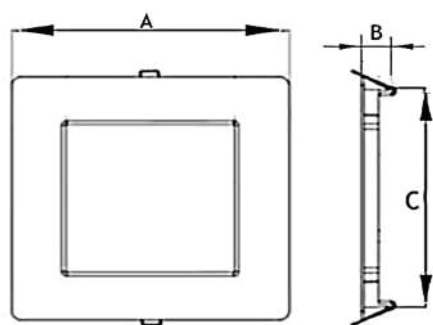

All Dimensions in "mm"



WATT	A	B	C
3W	85	25	70
6W	120	25	105
12W	170	25	155
18W	225	25	205
24W	300	25	285



SPOT COB

6,7,8,10,12,15,30,32,36,40 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220 - 240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	polycarbonate
CRI :	>0.80
BEAM ANGLE :	120
DRIVER :	EL SEWEDY
POWER :	6,7,9,10,12,15,20,30,32,36,40W
CHIP TYPE :	EPISTAR - SANAN
IP :	44

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

LUMEN

6 W (100 Lm/W)	600 Lm
7 W (100 Lm/W)	700 Lm
8 W (100 Lm/W)	800 Lm
10 W (100 Lm/W)	1000 Lm
12 W (100 Lm/W)	1200 Lm
15 W (100 Lm/W)	1500 Lm
30 W (100 Lm/W)	3000 Lm
32 W (100 Lm/W)	3200 Lm
36 W (100 Lm/W)	3600 Lm
40 W (100 Lm/W)	4000 Lm

CODE

6 W (WHITE)	SC6-6-R-20-160
7 W (WHITE)	SC7-6-R-20-163
8 W (WHITE)	SC8-6-R-20-165
10 W (WHITE)	SC10-6-R-20-167
12 W (WHITE)	SC12-6-R-20-169
15 W (WHITE)	SC15-6-R-20-171
20 W (WHITE)	SC20-6-R-20-173
30 W (WHITE)	SC30-6-R-20-175
32 W (WHITE)	SC32-6-R-20-177
36 W (WHITE)	SC36-6-R-20-179
40 W (WHITE)	SC40-6-R-20-181



LED BACKLIGHT SPOT

6,7,9,12,15,18,24,30 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-4000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	6,7,9,12,15,18,24,30 W
IP :	44
BEAM ANGLE :	120

LUMEN

6 W (100 Lm/W)	600 Lm
7 W (100 Lm/W)	700 Lm
9 W (100 Lm/W)	900 Lm
12 W (100 Lm/W)	1200 Lm
15 W (100 Lm/W)	1500 Lm
18 W (100 Lm/W)	1800 Lm
24 W (100 Lm/W)	2400 Lm
30 W (100 Lm/W)	3000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

6 W (WHITE)	SB6-6-S-20-185
7 W (WHITE)	SB7-6-S-20-187
9 W (WHITE)	SB9-6-S-20-189
12 W (WHITE)	SB12-6-S-20-191
15 W (WHITE)	SB15-6-S-20-193
18 W (WHITE)	SB18-6-S-20-195
24 W (WHITE)	SB24-6-S-20-197
30 W (WHITE)	SB30-6-S-20-199



INDUSTRIAL HIGH BAY

100,150,200 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	150 LM/W
CCT :	6500 k
BODY MATERIAL :	ALUMINUM DIE CAST
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
BEAM ANGLE :	120
IP :	65
BODY COLOR :	BLACK
POWER :	100,150,200 W

LUMEN

100 W (150 Lm/W)	15000 Lm
150 W (150Lm/W)	22500 Lm
200 W (150 Lm/W)	30000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

100 W	HB100-6-S-65-230
150 W	HB150-6-S-65-231
200 W	HB200-6-S-65-232



WATER PROOF 2x60 & 2x120 cm

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100-110 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	injected polycarbonate (pc) with high impact resistance
CRI :	>0.80
POWER CONSUMPTION :	2x18 W & 2x9 W
IP :	65
DIFFUSER / REFLECTOR	TRANSPARENT POLYCARBONATE

LUMEN


2X18 W (100Lm/W)	3600 Lm
2x9 W (100 Lm/W)	1800 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

2X18 W	WP36-6-S-65-227
2x9 W	WP18-6-S-65-297

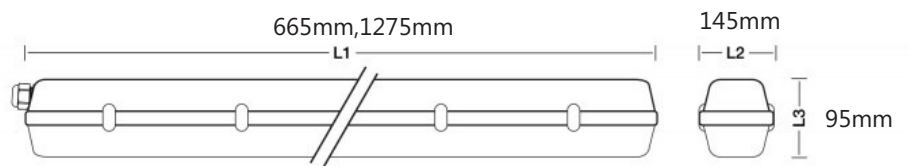



LED TUBE LAMP T8

9,18 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	120 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	PC
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
BEAM ANGLE :	270
IP :	40
BODY COLOR :	White
POWER :	9,18 W

LUMEN


9 W (120 Lm/W)	1080 Lm
18 W (120 Lm/W)	2160 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

9 W (WHITE)	T89-6-S-40-145
18 W (WHITE)	T818-6-S-40-143

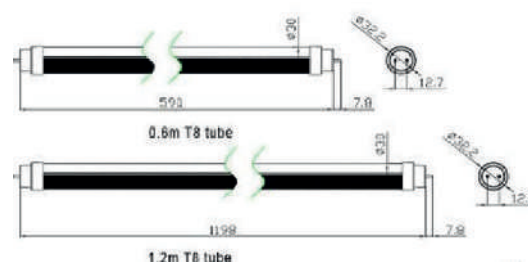



LED TRI PROOF (30,60,90,120,150cm) 20,40,70,80,100 W

Product Data

ELECTRICAL FEATURES



INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.98
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	110 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	20,40,70,80,100 W
	65
LIGHT SOURCE :	SMD

LUMEN

20 W	(110 Lm/W)	2200 Lm
40 W	(110 Lm/W)	4400 Lm
70 W	(110 Lm/W)	7700 Lm
80 W	(110 Lm/W)	8800 Lm
100 W	(110 Lm/W)	11000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

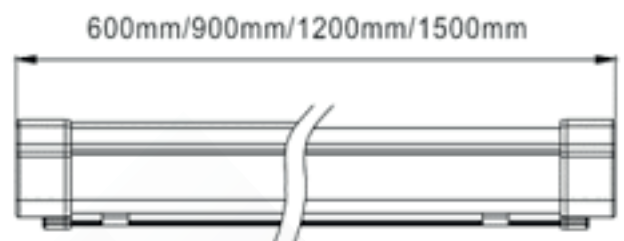



LED STRIP

9-14 W, 16-20 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	12 - 24 V DC
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	85 LM/W
CCT :	3000-6500 k
PCB WIDTH :	10 mm
LED Q'ty/m	120-240 PCS
BEAM ANGLE :	120
DRIVER :	EL SEWEDY
POWER :	9-14 w/m, 16-20 w/m
IP :	20 - 65
CRI :	>90
METERS/ROLL :	5 m/roll

LUMEN

120 led/m	1200 Lm/m
240 led/m	1400 Lm/m

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



LED EXIT SIGN 3-10W

- » Exterior material is flame-retardant plastic PC. ACRYL indicator board.
- » Operating Temperature:-10°C-50 'C
- » LED light source. with high quality NI-CD/NI-MH battery.
- » Applies advanced design of concepts, lighting designed as two-line operate mode, which extends operating life for the LED lighting source in the AC and DC,ensures the integrity of lighting source on emergency.
- » Standard: EN60598-2-22
- » Manual type test button switch. LED indicate the working condition.
- » Working Condition:
AC: work instructions window light on
Dc: work instructions window and emergency lighting window light on


Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
Operating Temperature	-10°C & -50 'C
Battery charging	24 hours
BODY MATERIAL :	PLASTIC PC.ACRYL
OPERATING (TIME)	90 MIN
EMERGENCY LED	1*6 pcs LED
Battery	1.2V 400mAH
BATTERY TYPE :	NI-CD/NI-MH battery.

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

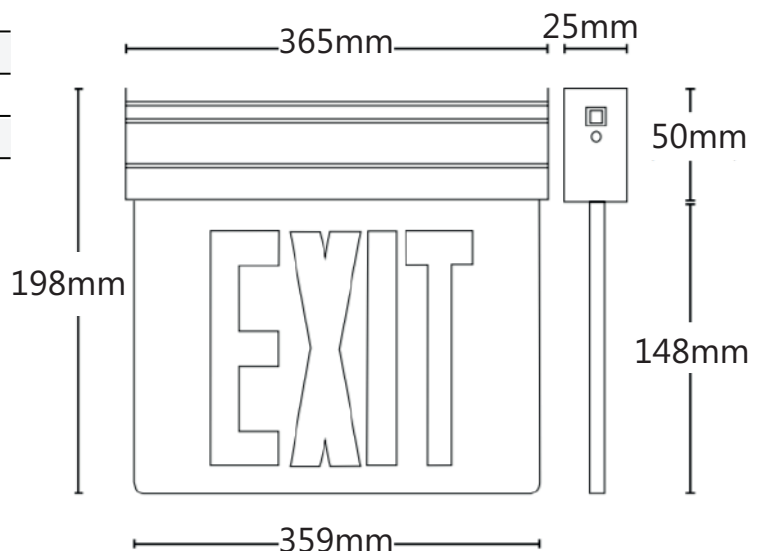



Less Power , More Light.



CATALOG 2022 OUTDOOR LIGHTING

Less Power , More Light.



EG.Light
EL SEWEDY



01000393917



18 شارع الدكتور محمد على البقل مصر الجديدة



eglight-elsewedy.com



info@eglight-elsewedy.com



LED FLOOD LIGHT 50,100,150,200,300,400 W

Product Data

ELECTRICAL FEATURES


INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	120 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	50,100,150,200,300,400 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LIGHT SOURCE :	SMD

LUMEN

50 W	(120 Lm/W)	UP TO 6000 Lm
100 W	(120 Lm/W)	UP TO 12000 Lm
150 W	(120 Lm/W)	UP TO 18000 Lm
200 W	(120 Lm/W)	UP TO 24000 Lm
300 W	(120 Lm/W)	UP TO 36000 Lm
400 W	(120 Lm/W)	UP TO 48000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

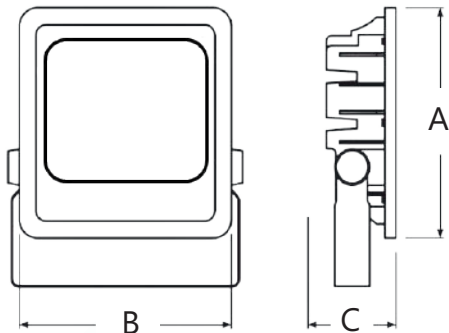

WATT	A	B	C
50W	270mm	280mm	65mm
100 W	310mm	290mm	100mm
150 W	350mm	330mm	100mm
200 W	350mm	330mm	100mm
300 W	420mm	380mm	100mm
400 W	420mm	380mm	100mm



LED ECONOMIC FLOOD LIGHT 50,100,150,200 W

Product Data

ELECTRICAL FEATURES


INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	120 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	50,100,150,200 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LIGHT SOURCE :	SMD
BEAM ANGLE :	120°

LUMEN

50 W	(120 Lm/W)	UP TO 6000 Lm
100 W	(120 Lm/W)	UP TO 12000 Lm
150 W	(120 Lm/W)	UP TO 18000 Lm
200 W	(120 Lm/W)	UP TO 24000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	2 YEARS

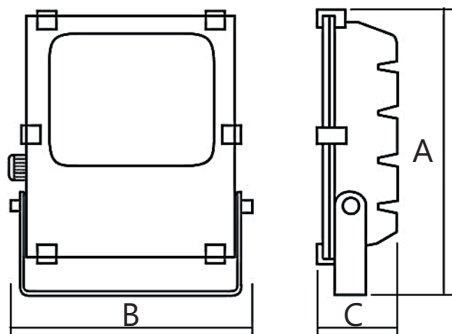

WATT	A	B	C
50W	240mm	210mm	60mm
100W	285mm	255mm	80mm
150W	345mm	310mm	80mm
200W	380mm	350mm	95mm



LED SLIM FLOOD LIGHT

50,100,150,200 W

Product Data

ELECTRICAL FEATURES


INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.97
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	120 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	50,100,150,200 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LIGHT SOURCE :	SMD
BEAM ANGLE :	120°

LUMEN

50 W	(120 Lm/W)	UP TO 6000 Lm
100 W	(120 Lm/W)	UP TO 12000 Lm
150 W	(120 Lm/W)	UP TO 18000 Lm
200 W	(120 Lm/W)	UP TO 24000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	2 YEARS

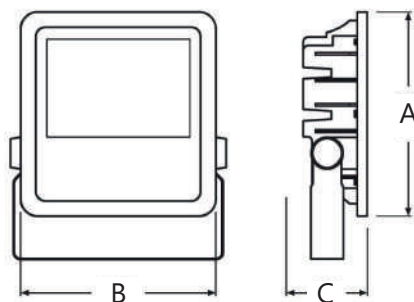

WATT	A	B	C
50W	280mm	260mm	70mm
100W	280mm	250mm	70mm
150W	350mm	300mm	70mm
200W	350mm	300mm	75mm



UP LIGHT 3,5,10,20,30 W

Product features:

High luminous efficiency , high index , low light decay

use qualified aluminum alloy shell , have good heat dissipation

Use the anti aging sealed ring which can endure the high temperature, anti ultraviolet , with the protection grade above IP65

constant current driver , start fast , no flicker , no glare

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	100 - 265 V
POWER FACTOR :	>0.6
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	70 - 60 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	3,5,6 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
DIAMETER :	3W : 65 mm 5W : 80 mm 10W : 100 mm 20W : 180 mm 30W : 220 mm
BEAM ANGLE :	120

LUMEN

3 W (70 Lm/W)	UP TO 210 Lm
5 W (70 Lm/W)	UP TO 350 Lm
10 W (70 Lm/W)	UP TO 700 Lm
20 W (70 Lm/W)	UP TO 1400 Lm
30 W (70 Lm/W)	UP TO 2100 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



LED SPIKE

7,15 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	100 - 265 V
POWER FACTOR :	>0.6
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	70 - 60 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	7,15 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LENGTH :	320 mm
DIAMETER	85 mm
BEAM ANGLE :	60

LUMEN

7 W (70 Lm/W)	UP TO 490 Lm
15 W (70 Lm/W)	UP TO 1050 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



SIDE UPLIGHT

2,3,4 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	100 - 265 V
POWER FACTOR :	>0.6
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	70 - 60 LM/W
CCT :	3000 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	7 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LENGTH :	320 mm
DIAMETER	85 mm
BEAM ANGLE :	60

LUMEN

2 W	(70 Lm/W)	UP TO 140 Lm
3 W	(70 Lm/W)	UP TO 210 Lm
4 W	(70 Lm/W)	UP TO 280 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



EG.Light
EL SEWEDY



STEP LIGHT 3,5,6 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	100 - 265 V
POWER FACTOR :	>0.6
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	50 - 60 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	3,5,6 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LENGTH :	210 mm
WIDTH :	60 mm
BEAM ANGLE :	15 - 120
CUT SIZE :	195*45 mm

LUMEN

3 W (60 Lm/W)	UP TO 180 Lm
5 W (60 Lm/W)	UP TO 300 Lm
6 W (60 Lm/W)	UP TO 360 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



UP&DOWN LIGHT

2*5 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	100 - 265 V
POWER FACTOR :	>0.6
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	65-70 LM/W
CCT :	3000 - 6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
DRIVER :	EL SEWEDY
POWER :	2*5 W
CHIP TYPE :	EPISTAR - SANAN
IP :	65
LENGTH :	300 mm
WIDTH :	80 mm
HEIGHT :	62 mm
BEAM ANGLE :	120

LUMEN

2*5 W (70 Lm/W)	UP TO 700 Lm
-----------------	--------------

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



RACKET STREET LIGHT 50,100,150,200W (SMD)

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	100-150-200 w
IP :	65
LIGHT SOURCE :	SMD

LUMEN

100 W (100 Lm/W)	10000 Lm
150 W (100 Lm/W)	15000 Lm
200 W (100 Lm/W)	20000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

50 W (White)	STS50-6-S-65-207
100 W (White)	STS100-6-S-65-209
150 W (White)	STS150-6-S-65-211



RACKET STREET LIGHT 50,100,150,200W (COB)

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	100 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	100-150-200 w
IP :	65
LIGHT SOURCE :	COB

LUMEN

100 W (100 Lm/W)	10000 Lm
150 W (100 Lm/W)	15000 Lm
200 W (100 Lm/W)	20000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

CODE

50 W (White)	STS50-6-S-65-201
100 W (White)	STS100-6-S-65-203
150 W (White)	STS150-6-S-65-205
200 W (White)	STS200-6-S-65-250



MARS 100,150,200 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	120 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	100-150-200 w
IP :	65
LIGHT SOURCE :	SMD

LUMEN

100 W (120 Lm/W)	12000 Lm
150 W (120 Lm/W)	18000 Lm
200 W (120 Lm/W)	24000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



HAVA

50,100,150 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	120 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM Die Cast
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	100-150-200 w
IP :	65
BEAM ANGLE :	120
BODY COLOR :	Black & GREY
FINISHING :	ELECTROSTATIC

LUMEN

100 W (120 Lm/W)	12000 Lm
150 W (120 Lm/W)	18000 Lm
200 W (120 Lm/W)	24000 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS



MARIO 100,150 W

Product Data

ELECTRICAL FEATURES

INPUT VOLTAGE :	220-240 V
POWER FACTOR :	>0.95
FREQUENCY :	50-60 HZ
LUMEN EFFICACY :	130 LM/W
CCT :	3000-6500 k
BODY MATERIAL :	ALUMINUM
CRI :	>0.80
CHIP TYPE :	EPISTAR-SANAN
DRIVER :	EL SEWEDY
POWER :	100-150 w
IP :	65
LIGHT SOURCE :	SMD

LUMEN

100 W (130 Lm/W)	13000 Lm
150 W (130 Lm/W)	19500 Lm

LIFE TIME & WARRANTY

LIFE TIME :	30.000 Hrs
WARRANTY :	3 YEARS

